



**MVAPICH**

MPI, PGAS and Hybrid MPI+PGAS Library

# Building Efficient HPC Clouds with MVAPICH2 and OpenStack over SR-IOV Enabled InfiniBand Clusters

Talk at OpenStack Summit (April 2016)

by

**Dhableswar K. (DK) Panda**

The Ohio State University

E-mail: [panda@cse.ohio-state.edu](mailto:panda@cse.ohio-state.edu)

<http://www.cse.ohio-state.edu/~panda>


**Xiaoyi Lu**

The Ohio State University

E-mail: [luxi@cse.ohio-state.edu](mailto:luxi@cse.ohio-state.edu)

<http://www.cse.ohio-state.edu/~luxi>

# Cloud Computing and Virtualization

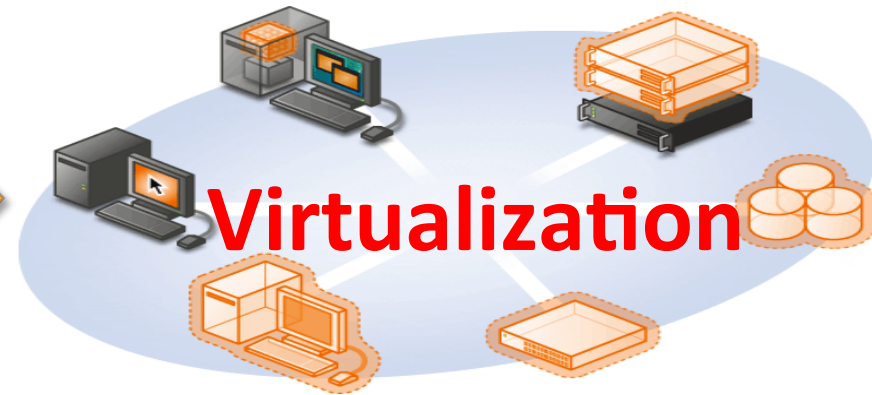

- Cloud Computing focuses on maximizing the effectiveness of the shared resources
- Virtualization is the key technology for resource sharing in the Cloud
- Widely adopted in industry computing environment
- IDC Forecasts Worldwide Public IT Cloud Services Spending to Reach Nearly \$108 Billion by 2017 (Courtesy: <http://www.idc.com/getdoc.jsp?containerId=prUS24298013>)

# HPC Cloud - Combining HPC with Cloud

- IDC expects that by 2017, HPC ecosystem revenue will jump to a record \$30.2 billion. IDC foresees public clouds, and especially custom public clouds, supporting an increasing proportion of the aggregate HPC workload as these cloud facilities grow more capable and mature ([Courtesy: http://www.idc.com/getdoc.jsp?containerId=247846](http://www.idc.com/getdoc.jsp?containerId=247846))
- Combining HPC with Cloud is still facing challenges because of the performance overhead associated virtualization support
  - **Lower performance of virtualized I/O devices**
- HPC Cloud Examples
  - **Amazon EC2 with Enhanced Networking**
    - Using Single Root I/O Virtualization (SR-IOV)
    - Higher performance (packets per second), lower latency, and lower jitter
    - 10 GigE
  - **NSF Chameleon Cloud**

# NSF Chameleon Cloud: A Powerful and Flexible Experimental Instrument



- Large-scale instrument
  - Targeting Big Data, Big Compute, Big Instrument research
  - ~650 nodes (~14,500 cores), 5 PB disk over two sites, 2 sites connected with 100G network
- Reconfigurable instrument
  - Bare metal reconfiguration, operated as single instrument, graduated approach for ease-of-use
- Connected instrument
  - Workload and Trace Archive
  - Partnerships with production clouds: CERN, OSDC, Rackspace, Google, and others
  - Partnerships with users
- Complementary instrument
  - Complementing GENI, Grid'5000, and other testbeds
- Sustainable instrument
  - Industry connections




<http://www.chameleoncloud.org/>



# Single Root I/O Virtualization (SR-IOV)

- **Single Root I/O Virtualization (SR-IOV)** is providing new opportunities to design HPC cloud with very little low overhead
- Allows a single physical device, or a Physical Function (PF), to present itself as multiple virtual devices, or Virtual Functions (VFs)
- VFs are designed based on the existing non-virtualized PFs, no need for driver change
- Each VF can be dedicated to a single VM through PCI pass-through
- Work with 10/40 GigE and InfiniBand

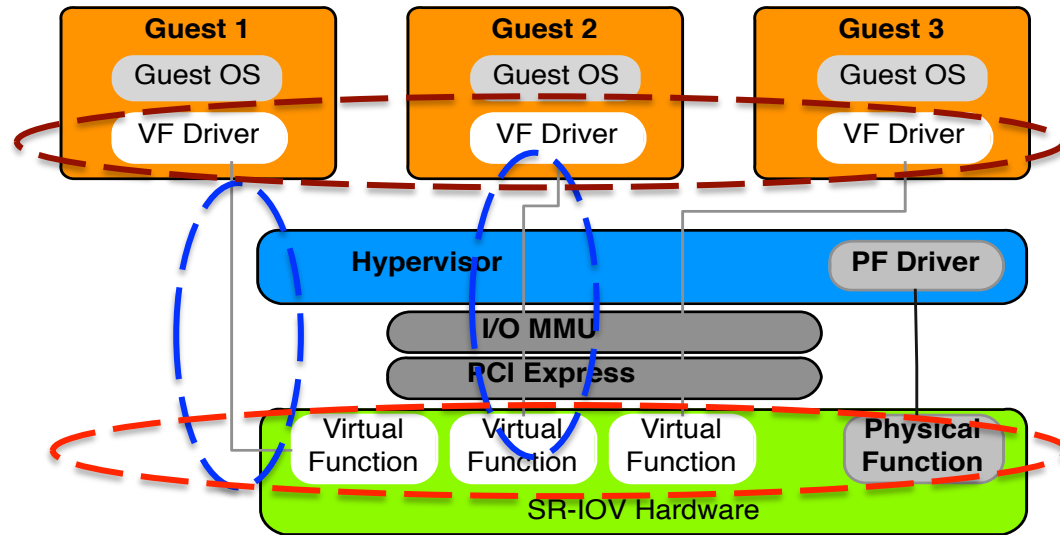

# Building HPC Cloud with SR-IOV and InfiniBand

- High-Performance Computing (HPC) has adopted advanced interconnects and protocols
  - InfiniBand
  - 10/40 Gigabit Ethernet/iWARP
  - RDMA over Converged Enhanced Ethernet (RoCE)
- Very Good Performance
  - Low latency (few micro seconds)
  - High Bandwidth (100 Gb/s with EDR InfiniBand)
  - Low CPU overhead (5-10%)
- OpenFabrics software stack with IB, iWARP and RoCE interfaces are driving HPC systems
- **How to Build HPC Cloud with SR-IOV and InfiniBand for delivering optimal performance?**

# Overview of the MVAPICH2 Project

- High Performance open-source MPI Library for InfiniBand, 10-40Gig/iWARP, and RDMA over Converged Enhanced Ethernet (RoCE)
  - MVAPICH (MPI-1), MVAPICH2 (MPI-2.2 and MPI-3.0), Available since 2002
  - MVAPICH2-X (MPI + PGAS), Available since 2011
  - Support for GPGPUs (MVAPICH2-GDR) and MIC (MVAPICH2-MIC), Available since 2014
  - Support for Virtualization (MVAPICH2-Virt), Available since 2015
  - Support for Energy-Awareness (MVAPICH2-EA), Available since 2015
  - **Used by more than 2,550 organizations in 79 countries**
  - **More than 365,000 (> 0.36 million) downloads from the OSU site directly**
  - Empowering many TOP500 clusters (Nov '15 ranking)
    - 10<sup>th</sup> ranked 519,640-core cluster (Stampede) at TACC
    - 13<sup>th</sup> ranked 185,344-core cluster (Pleiades) at NASA
    - 25<sup>th</sup> ranked 76,032-core cluster (Tsubame 2.5) at Tokyo Institute of Technology and many others
  - Available with software stacks of many vendors and Linux Distros (RedHat and SuSE)
  - <http://mvapich.cse.ohio-state.edu>
- Empowering Top500 systems for over a decade
  - System-X from Virginia Tech (3<sup>rd</sup> in Nov 2003, 2,200 processors, 12.25 TFlops) ->
  - Stampede at TACC (10<sup>th</sup> in Nov'15, 519,640 cores, 5.168 Plops)

# MVAPICH2 Architecture

## High Performance Parallel Programming Models

**Message Passing Interface  
(MPI)**

**PGAS  
(UPC, OpenSHMEM, CAF, UPC++)**

**Hybrid --- MPI + X  
(MPI + PGAS + OpenMP/Cilk)**

## High Performance and Scalable Communication Runtime

### Diverse APIs and Mechanisms

Point-to-point  
Primitives

Collectives  
Algorithms

Job Startup

Energy-  
Awareness

Remote  
Memory  
Access

I/O and  
File Systems

Fault  
Tolerance

Virtualization

Active  
Messages

Introspection  
& Analysis

### Support for Modern Networking Technology (InfiniBand, iWARP, RoCE, OmniPath)

#### Transport Protocols

RC

XRC

UD

DC

#### Modern Features

UMR

ODP\*

SR-  
IOV

Multi  
Rail

### Support for Modern Multi-/Many-core Architectures (Intel-Xeon, OpenPower, Xeon-Phi (MIC, KNL\*), NVIDIA GPGPU)

#### Transport Mechanisms

Shared  
Memory

CMA

IVSHMEM

#### Modern Features

MCDRAM\*


NVLink\*

CAPI\*

\* Upcoming



# MVAPICH/MVAPICH2 Release Timeline and Downloads

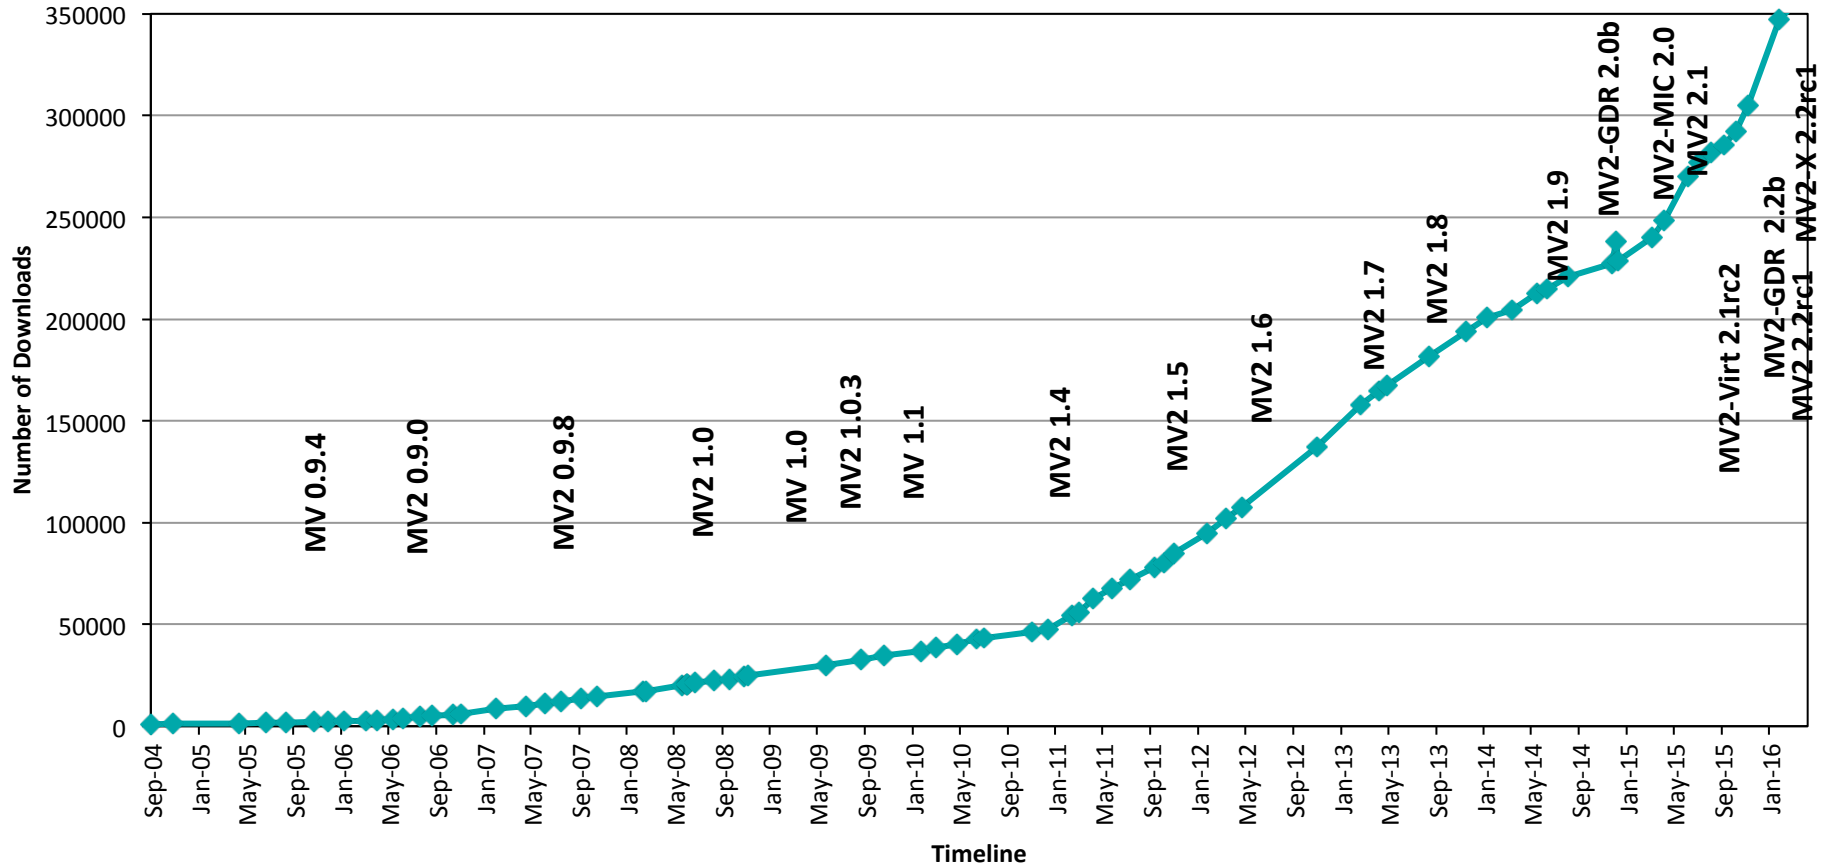

# MVAPICH2 Software Family


Requirements	MVAPICH2 Library to use
MPI with IB, iWARP and RoCE	MVAPICH2
Advanced MPI, OSU INAM, PGAS and MPI+PGAS with IB and RoCE	MVAPICH2-X
MPI with IB & GPU	MVAPICH2-GDR
MPI with IB & MIC	MVAPICH2-MIC
HPC Cloud with MPI & IB	MVAPICH2-Virt
Energy-aware MPI with IB, iWARP and RoCE	MVAPICH2-EA



# The High-Performance Big Data (HiBD) Project

- RDMA for Apache Spark
- RDMA for Apache Hadoop 2.x (RDMA-Hadoop-2.x)
  - Plugins for Apache, Hortonworks (HDP) and Cloudera (CDH) Hadoop distributions
- RDMA for Apache Hadoop 1.x (RDMA-Hadoop)
- RDMA for Memcached (RDMA-Memcached)
- OSU HiBD-Benchmarks (OHB)
  - HDFS and Memcached Micro-benchmarks
- <http://hibd.cse.ohio-state.edu>
- Users Base: 165 organizations from 22 countries
- More than 16,200 downloads from the project site
- RDMA for Apache HBase and Impala (upcoming)

Available for InfiniBand and RoCE

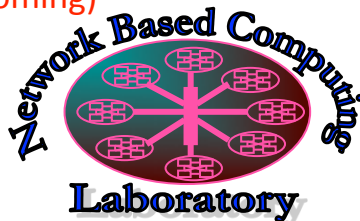

# Approaches to Build HPC Clouds


- MVAPICH2-Virt with SR-IOV and IVSHMEM
  - Standalone, OpenStack
- MVAPICH2-Virt on SLURM
  - SLURM alone, SLURM + OpenStack
- MVAPICH2 with Containers
- Appliances (HPC & Big Data) on Chameleon Cloud

## MVAPICH2-Virt 2.1

- Major Features and Enhancements
  - Based on MVAPICH2 2.1
  - Support for efficient MPI communication over SR-IOV enabled InfiniBand networks
  - High-performance and locality-aware MPI communication with IVSHMEM
  - Support for auto-detection of IVSHMEM device in virtual machines
  - Automatic communication channel selection among SR-IOV, IVSHMEM, and CMA/LiMIC2
  - Support for integration with OpenStack
  - Support for easy configuration through runtime parameters
  - Tested with
    - Mellanox InfiniBand adapters (ConnectX-3 (56Gbps))
    - OpenStack Juno

# Overview of MVAPICH2-Virt with SR-IOV and IVSHMEM

- Redesign MVAPICH2 to make it virtual machine aware
  - SR-IOV shows **near to native performance** for inter-node point to point communication
  - **IVSHMEM** offers **shared memory** based data access across co-resident VMs
  - **Locality Detector**: maintains the locality information of co-resident virtual machines
  - **Communication Coordinator**: selects the communication channel (SR-IOV, IVSHMEM) adaptively

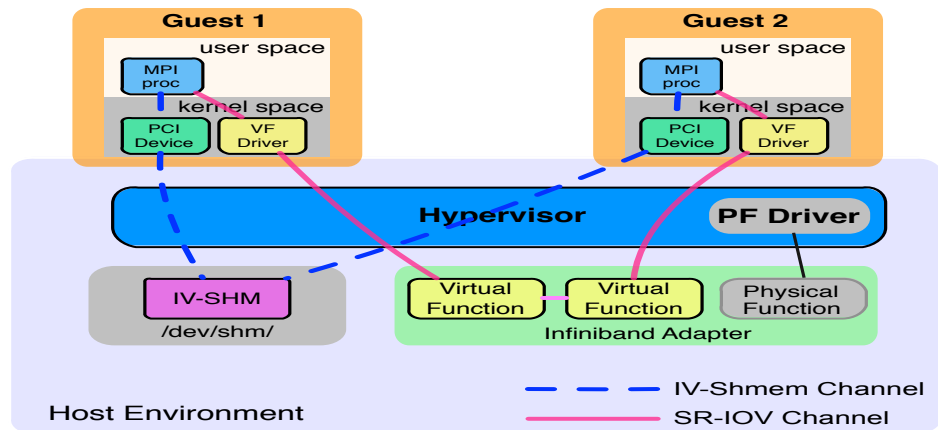


J. Zhang, X. Lu, J. Jose, R. Shi, D. K. Panda. Can Inter-VM Shmem Benefit MPI Applications on SR-IOV based Virtualized InfiniBand Clusters? **Euro-Par**, 2014

J. Zhang, X. Lu, J. Jose, R. Shi, M. Li, D. K. Panda. High Performance MPI Library over SR-IOV Enabled InfiniBand Clusters. **HiPC**, 2014

# MVAPICH2-Virt with SR-IOV and IVSHMEM over OpenStack

- OpenStack is one of the most popular open-source solutions to build clouds and manage virtual machines
- Deployment with OpenStack
  - Supporting SR-IOV configuration
  - Supporting IVSHMEM configuration
  - Virtual Machine aware design of MVAPICH2 with SR-IOV
- An efficient approach to build HPC Clouds with MVAPICH2-Virt and OpenStack

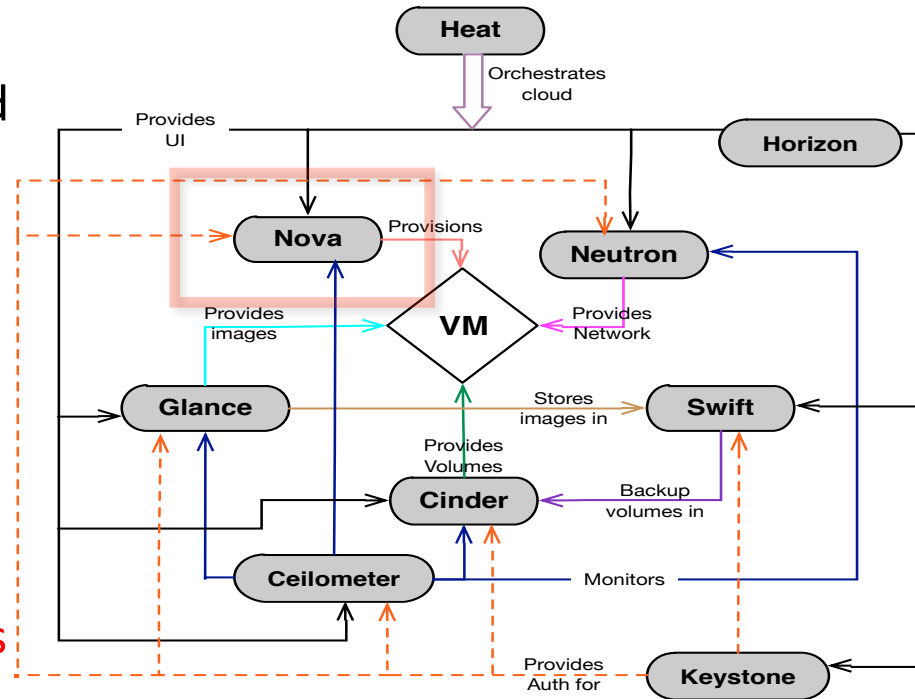

J. Zhang, X. Lu, M. Arnold, D. K. Panda. MVAPICH2 over OpenStack with SR-IOV: An Efficient Approach to Build HPC Clouds. CCGrid, 2015

# Performance Evaluation

Cluster	Nowlab Cloud		Amazon EC2	
Instance	4 Core/VM	8 Core/VM	4 Core/VM	8 Core/VM
Platform	RHEL 6.5 Qemu+KVM HVM SLURM 14.11.8		Amazon Linux (EL6) Xen HVM C3.xlarge <sup>[1]</sup> Instance	Amazon Linux (EL6) Xen HVM C3.2xlarge <sup>[1]</sup> Instance
CPU	SandyBridge Intel(R) Xeon E5-2670 (2.6GHz)		IvyBridge Intel(R) Xeon E5-2680v2 (2.8GHz)	
RAM	6 GB	12 GB	7.5 GB	15 GB
Interconnect	FDR (56Gbps) InfiniBand Mellanox ConnectX-3 with SR-IOV <sup>[2]</sup>		10 GigE with Intel ixgbevf SR-IOV driver <sup>[2]</sup>	

<sup>[1]</sup> Amazon EC2 C3 instances: compute-optimized instances, providing customers with the highest performing processors, good for HPC workloads

<sup>[2]</sup> Nowlab Cloud is using InfiniBand FDR (56Gbps), while Amazon EC2 C3 instances are using 10 GigE. Both have SR-IOV




# Experiments Carried Out


- Point-to-point
  - Two-sided and One-sided
  - Latency and Bandwidth
  - Intra-node and Inter-node <sup>[1]</sup>
- Applications
  - NAS and Graph500

[1] Amazon EC2 does not support users to explicitly allocate VMs in one physical node so far. We allocate multiple VMs in one logical group and compare the point-to-point performance for each pair of VMs. We see the VMs who have the lowest latency as located within one physical node (Intra-node), otherwise Inter-node.

# Point-to-Point Performance – Latency & Bandwidth (Intra-node)

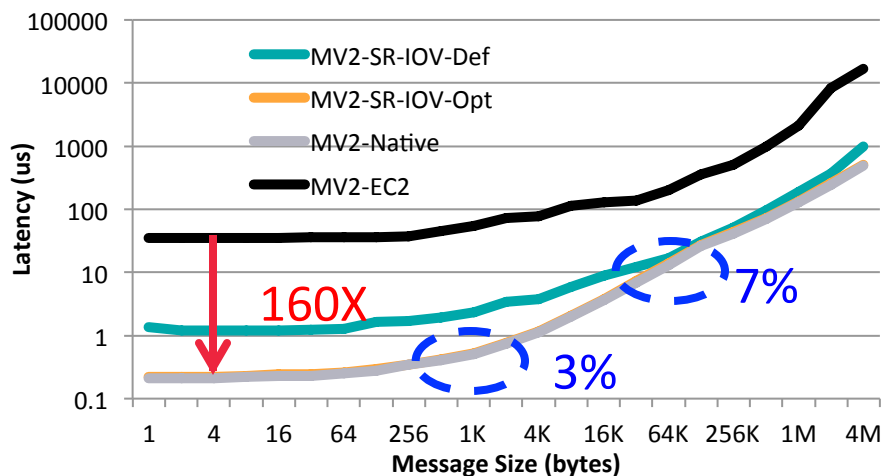


Intra-node Inter-VM pt2pt Latency

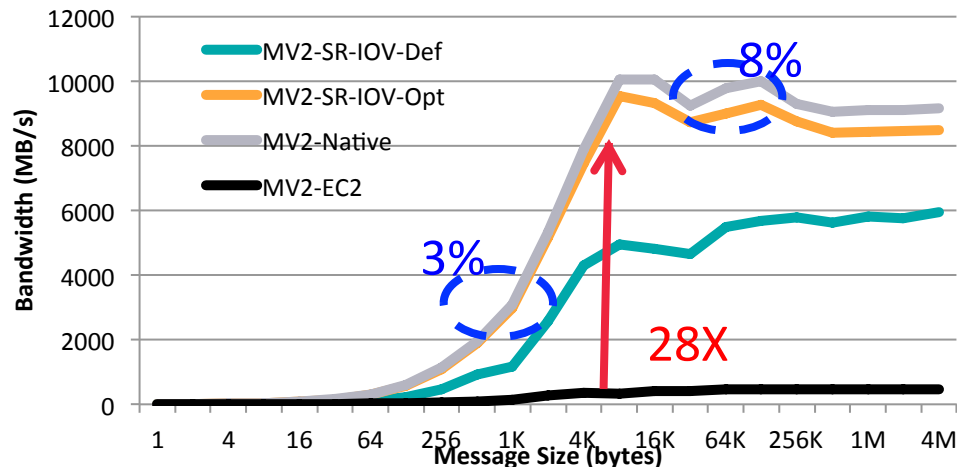


Intra-node Inter-VM pt2pt Bandwidth

- EC2 C3.2xlarge instances
- Compared to SR-IOV-Def, up to **84%** and **158%** performance improvement on Lat & BW
- Compared to Native, **3%-7%** overhead for Lat, **3%-8%** overhead for BW
- Compared to EC2, up to **160X** and **28X** performance speedup on Lat & BW

# Point-to-Point Performance – Latency & Bandwidth (Inter-node)

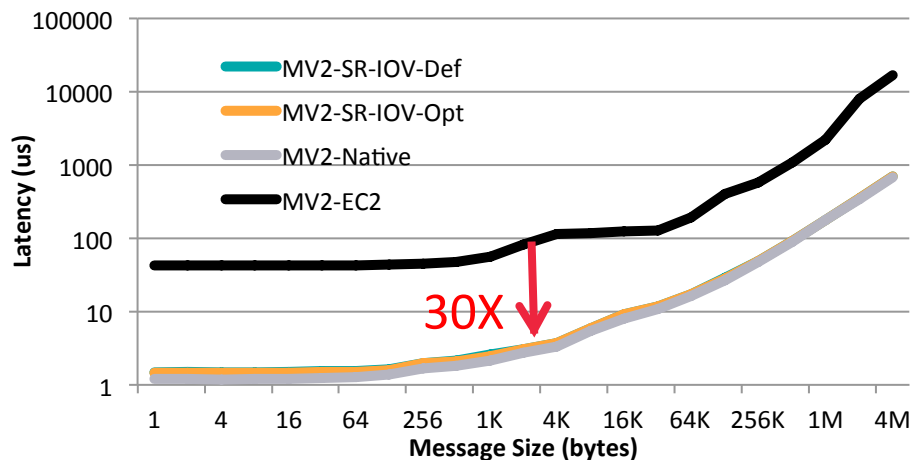


Inter-node Inter-VM pt2pt Latency

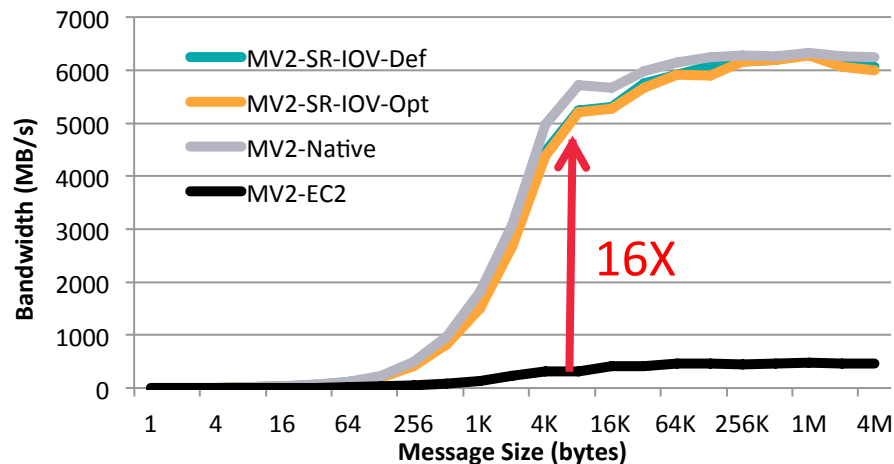


Inter-node Inter-VM pt2pt Bandwidth

- EC2 C3.2xlarge instances
- Similar performance with SR-IOV-Def
- Compared to Native, **2%-8%** overhead on Lat & BW for 8KB+ messages
- Compared to EC2, up to **30X** and **16X** performance speedup on Lat & BW

# Application-Level Performance (8 VM \* 8 Core/VM)

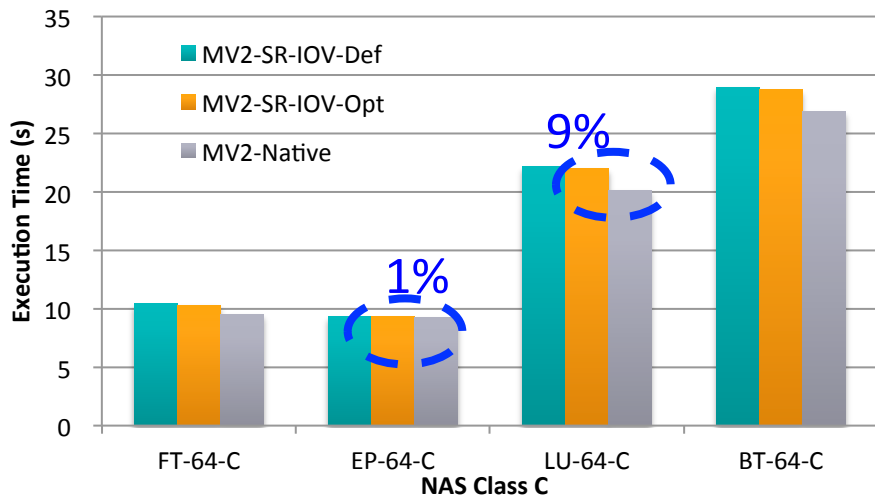


NAS

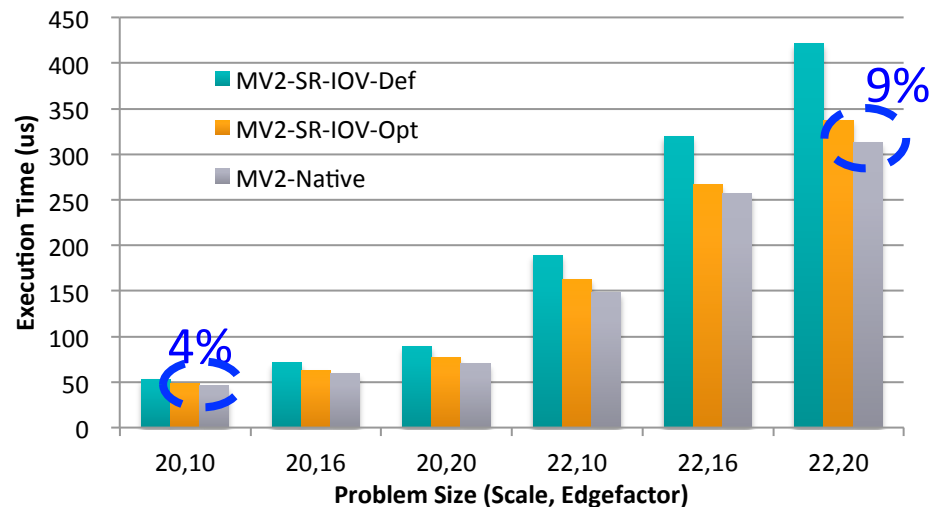


Graph500

- Compared to Native, **1-9%** overhead for NAS
- Compared to Native, **4-9%** overhead for Graph500

# Application-Level Performance on Chameleon

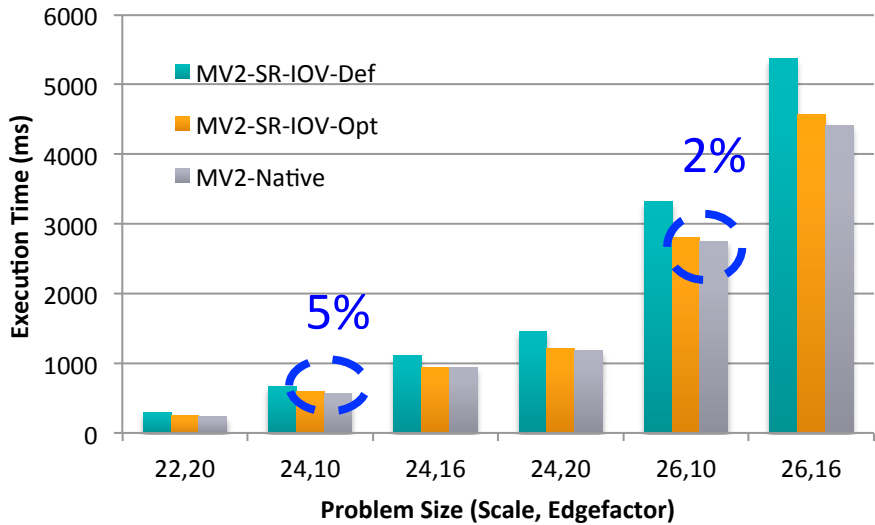

Graph500

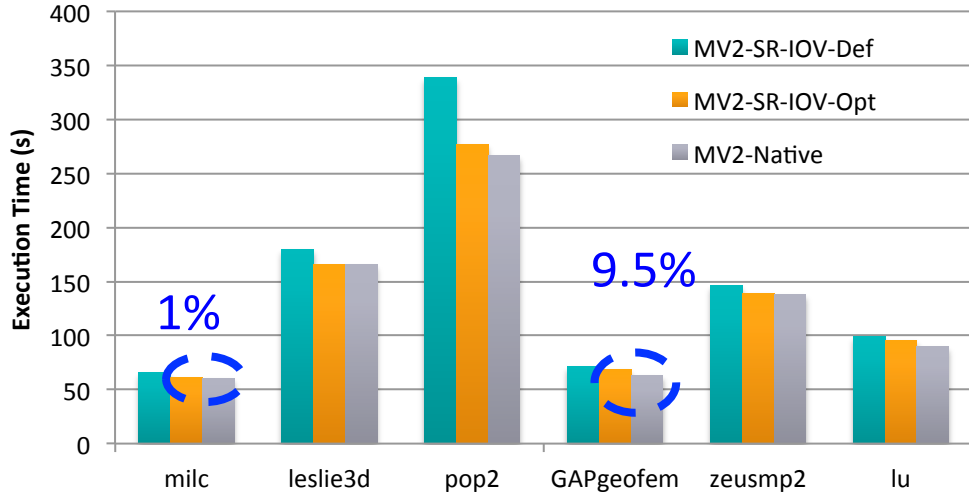

SPEC MPI2007

- 32 VMs, 6 Core/VM
- Compared to Native, 2-5% overhead for Graph500 with 128 Procs
- Compared to Native, 1-9.5% overhead for SPEC MPI2007 with 128 Procs

# Approaches to Build HPC Clouds


- MVAPICH2-Virt with SR-IOV and IVSHMEM
  - Standalone, OpenStack
- MVAPICH2-Virt on SLURM
  - SLURM alone, SLURM + OpenStack
- MVAPICH2 with Containers
- Appliances (HPC & Big Data) on Chameleon Cloud

# Can HPC Clouds be built with MVAPICH2-Virt on SLURM?


- SLURM is one of the most popular open-source solutions to manage huge amounts of machines in HPC clusters.
- How to **build a SLURM-based HPC Cloud with near native performance** for MPI applications over SR-IOV enabled InfiniBand HPC clusters?
- What are the **requirements** on SLURM to support SR-IOV and IVSHMEM provided **in HPC Clouds**?
- How much **performance benefit** can be achieved on MPI primitive operations and applications **in “MVAPICH2-Virt on SLURM”-based HPC clouds**?

# Typical Usage Scenarios


Compute Nodes

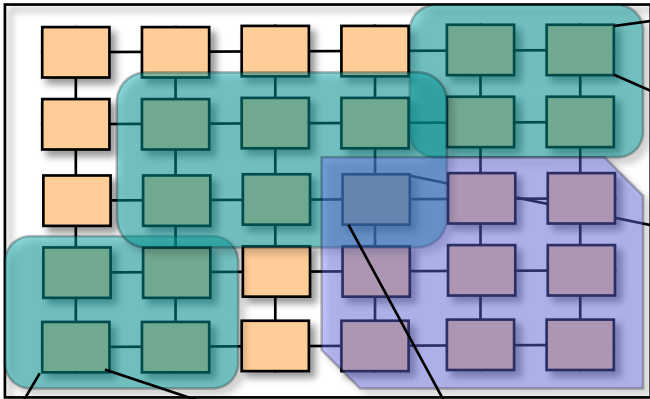


Exclusive Allocations  
Concurrent Jobs

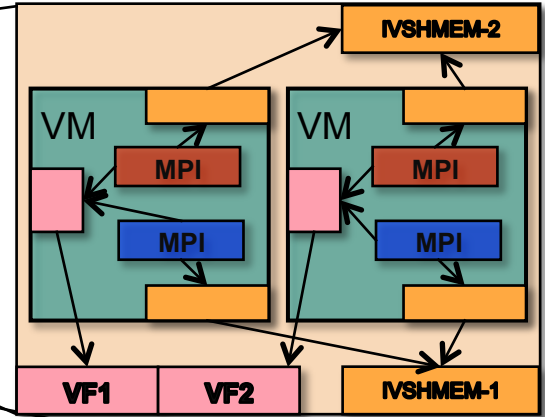

Shared-host Allocations  
Concurrent Jobs

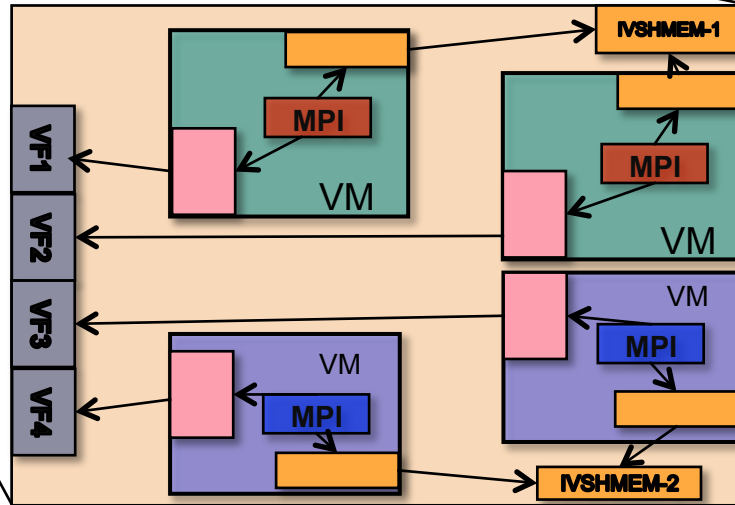

Exclusive Allocations  
Sequential Jobs

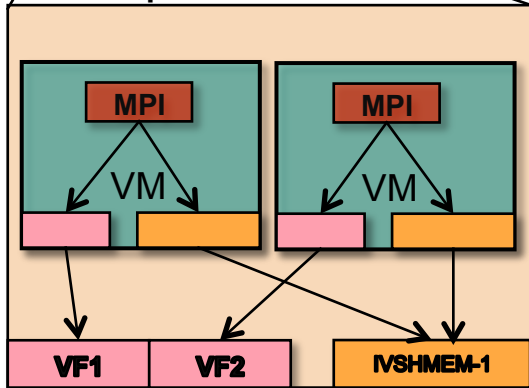





# Need for Supporting SR-IOV and IVSHMEM in SLURM

- Requirement of managing and isolating virtualized resources of SR-IOV and IVSHMEM
- Such kind of management and isolation is hard to be achieved by MPI library alone, **but much easier with SLURM**
- **Efficient running MPI applications on HPC Clouds needs SLURM to support managing SR-IOV and IVSHMEM**
  - Can critical HPC resources be efficiently shared among users by extending SLURM with support for SR-IOV and IVSHMEM based virtualization?
  - Can SR-IOV and IVSHMEM enabled SLURM and MPI library provide bare-metal performance for end applications on HPC Clouds?

# Workflow of Running MPI Jobs with MVAPICH2-Virt on SLURM

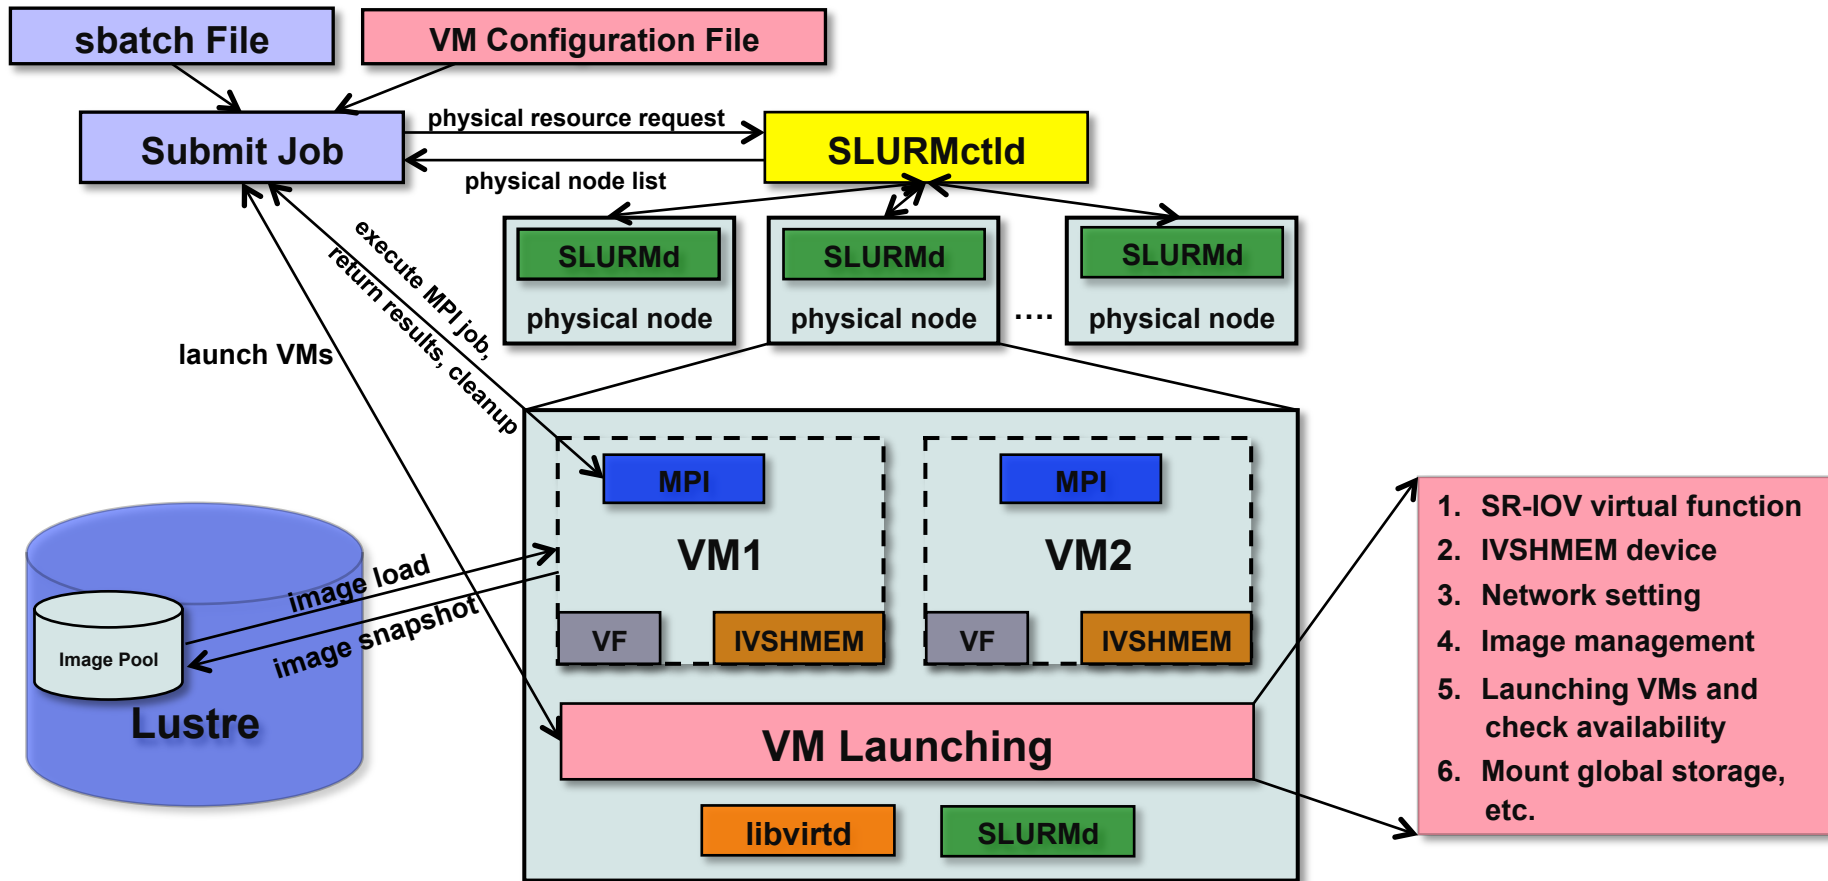

# SLURM SPANK Plugin based Design

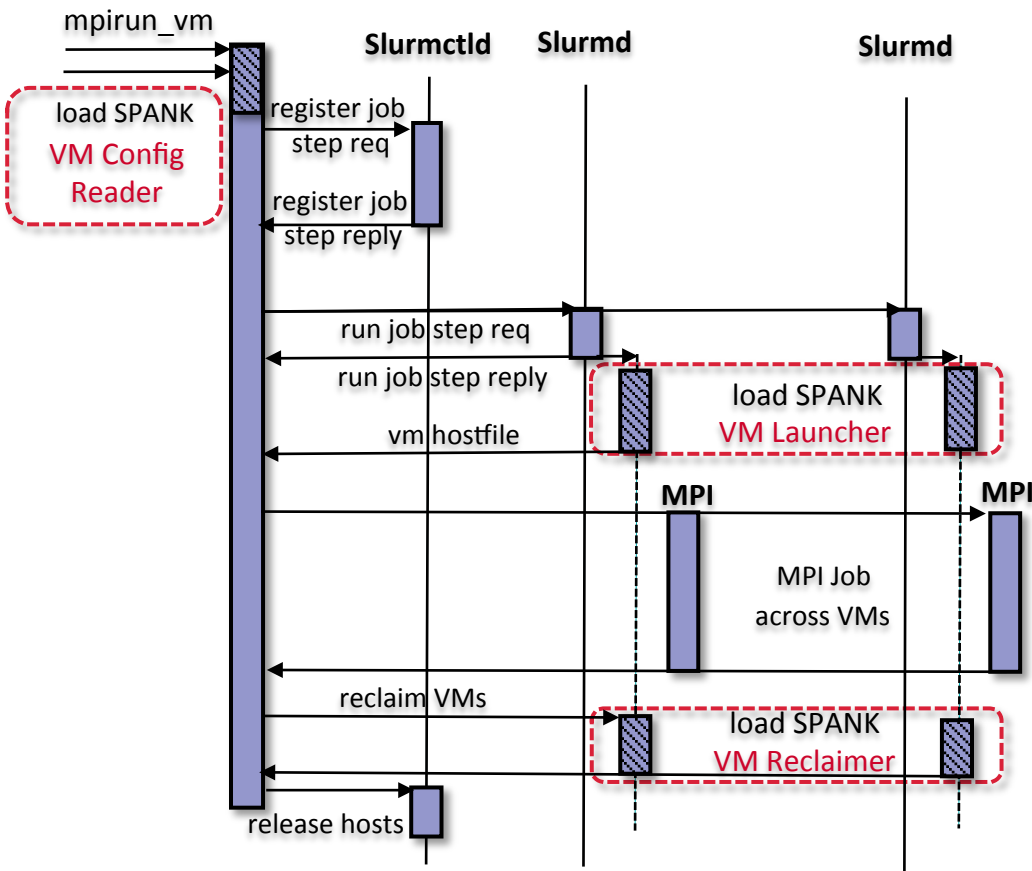


- **VM Configuration Reader** – Register all VM configuration options, set in the job control environment so that they are visible to all allocated nodes.
- **VM Launcher** – Setup VMs on each allocated nodes.
  - **File based lock** to detect occupied VF and exclusively allocate free VF
  - **Assign a unique ID** to each IVSHMEM and dynamically attach to each VM
- **VM Reclaimer** – Tear down VMs and reclaim resources

# Benefits of Plugin-based Designs for SLURM

- Coordination
  - With global information, SLURM plugin can manage SR-IOV and IVSHMEM resources easily for concurrent jobs and multiple users
- Performance
  - Faster coordination, SR-IOV and IVSHMEM aware resource scheduling, etc.
- Scalability
  - Taking advantage of the scalable architecture of SLURM
- Fault Tolerance
- Permission
- Security

# SLURM SPANK Plugin with OpenStack based Design

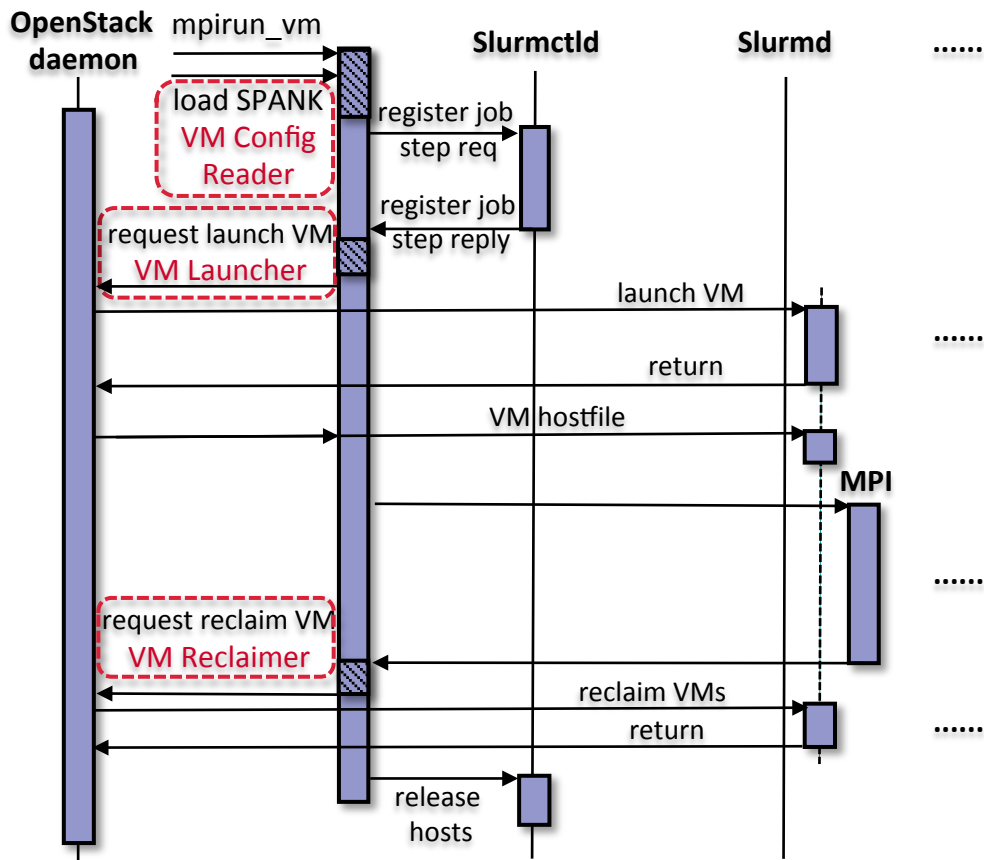


- **VM Configuration Reader** – VM options register
- **VM Launcher, VM Reclaimer** – Offload to underlying OpenStack infrastructure
  - **PCI Whitelist** to passthrough free VF to VM
  - **Extend Nova** to enable IVSHMEM when launching VM

J. Zhang, X. Lu, S. Chakraborty, D. K. Panda.  
SLURM-V: Extending SLURM for Building Efficient HPC Cloud with SR-IOV and IVShmem. **Euro-Par**, 2016

# Benefits of SLURM Plugin-based Designs with OpenStack


- Easy Management
  - Directly use underlying OpenStack infrastructure to manage authentication, image, networking, etc.
- Component Optimization
  - Directly inherit optimizations on different components of OpenStack
- Scalability
  - Taking advantage of the scalable architecture of both OpenStack and SLURM
- Performance

# Comparison on Total VM Startup Time

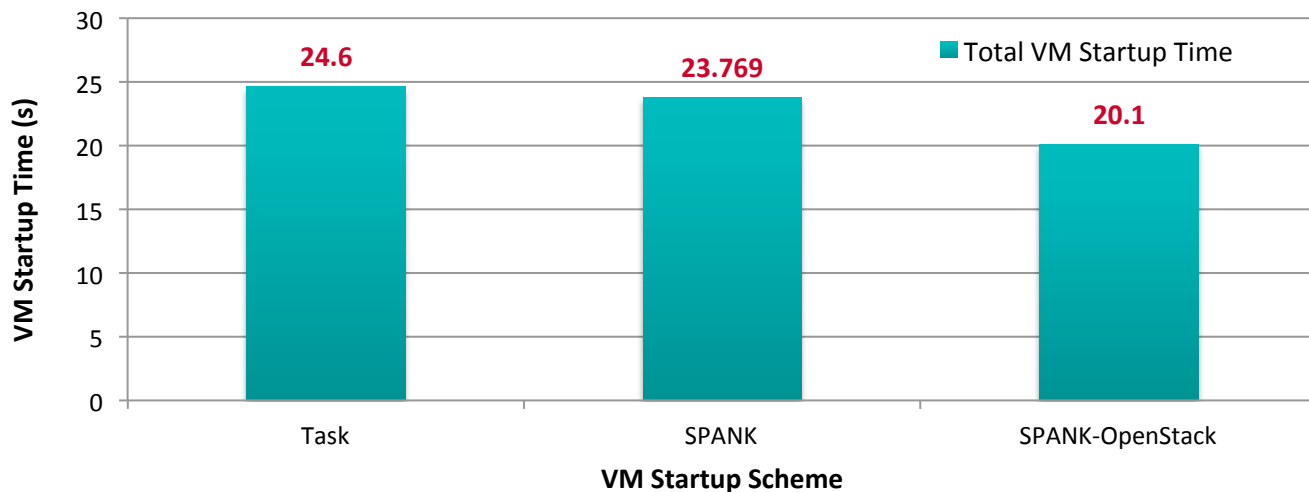

- Task - implement and explicitly insert three components in job batch file
- SPANK - SPANK Plugin based design
- SPANK-OpenStack – offload tasks to underlying OpenStack infrastructure

# Application-Level Performance on Chameleon (Graph500)

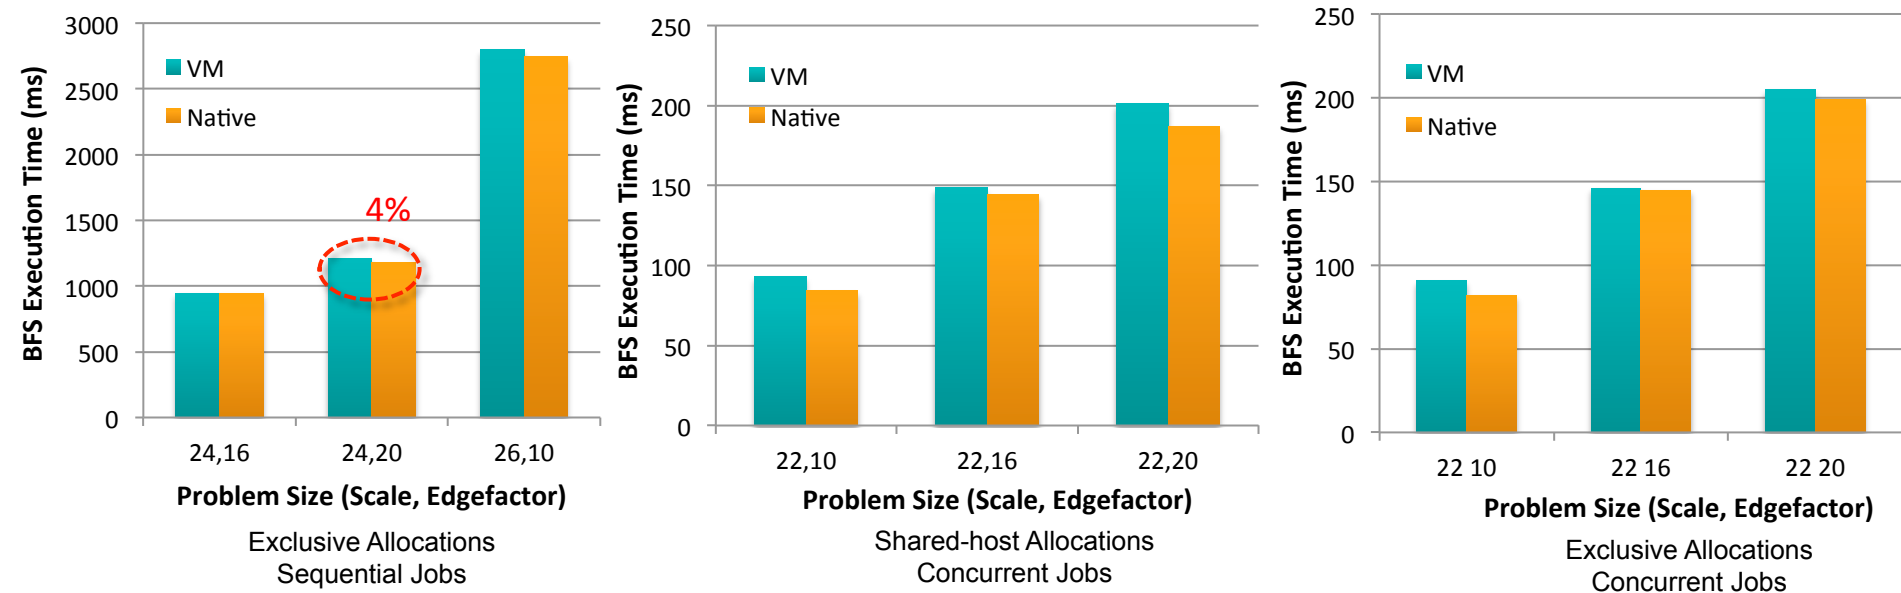

- 32 VMs across 8 nodes, 6 Core/VM
- EASJ - Compared to Native, less than 4% overhead with 128 Procs
- SACJ, EACJ – Also minor overhead, when running NAS as concurrent job with 64 Procs





# Approaches to Build HPC Clouds

- MVAPICH2-Virt with SR-IOV and IVSHMEM
  - Standalone, OpenStack
- MVAPICH2-Virt on SLURM
  - SLURM alone, SLURM + OpenStack
- MVAPICH2 with Containers
- Appliances (HPC & Big Data) on Chameleon Cloud

# Containers-based Design: Issues, Challenges, and Approaches


- Container-based technologies (such as Docker) provide **lightweight** virtualization solutions
- What are the performance bottlenecks when running MPI applications on multiple containers per host in HPC cloud?
- Can we propose a new design to overcome the bottleneck on such container-based HPC cloud?
- Can optimized design deliver **near-native performance** for different container deployment scenarios?
- **Locality-aware** based design to enable **CMA** and **Shared memory** channels for MPI communication across co-resident containers

# Containers Support: MVAPICH2 Intra-node Inter-Container Point-to-Point Performance on Chameleon

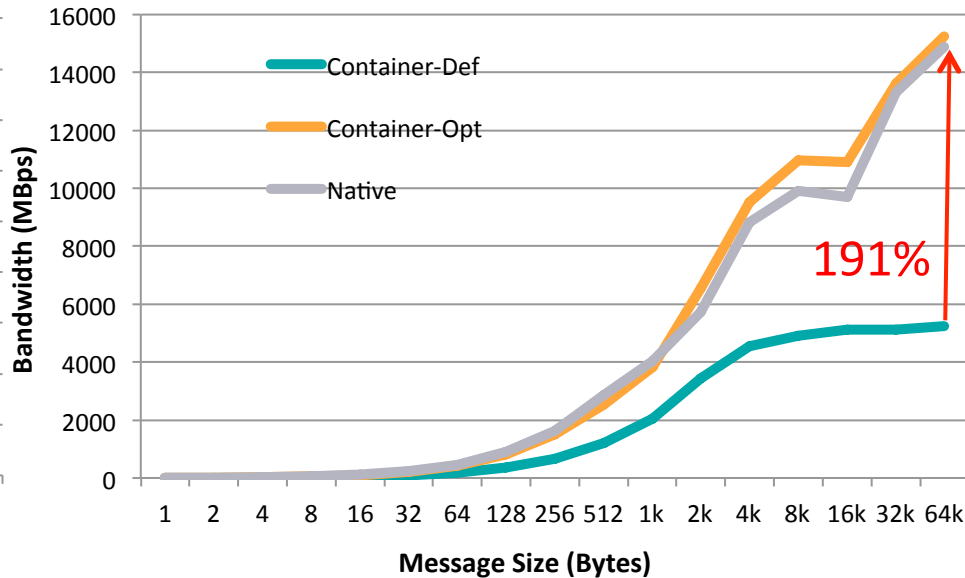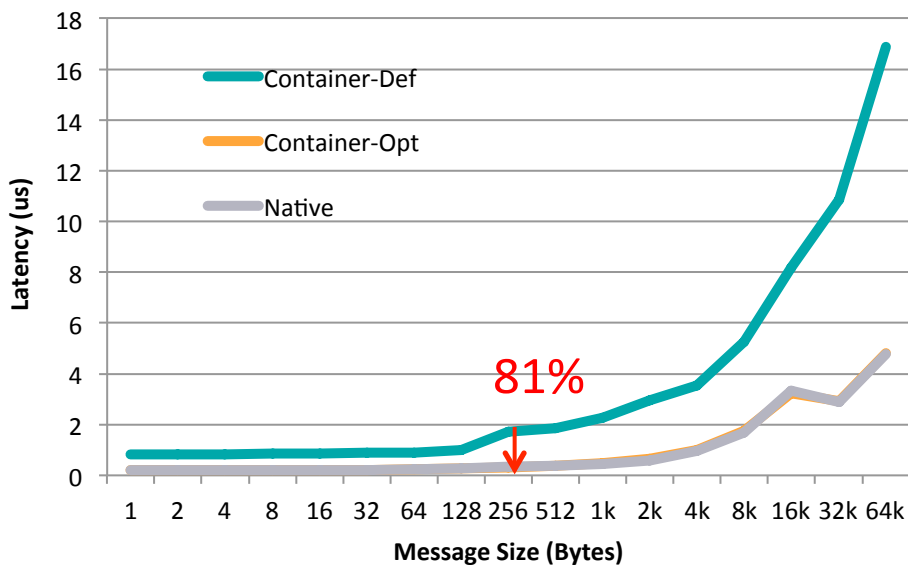


- Intra-Node Inter-Container
- Compared to Container-Def, up to 81% and 191% improvement on Latency and BW
- Compared to Native, minor overhead on Latency and BW

# Containers Support: MVAPICH2 Collective Performance on Chameleon

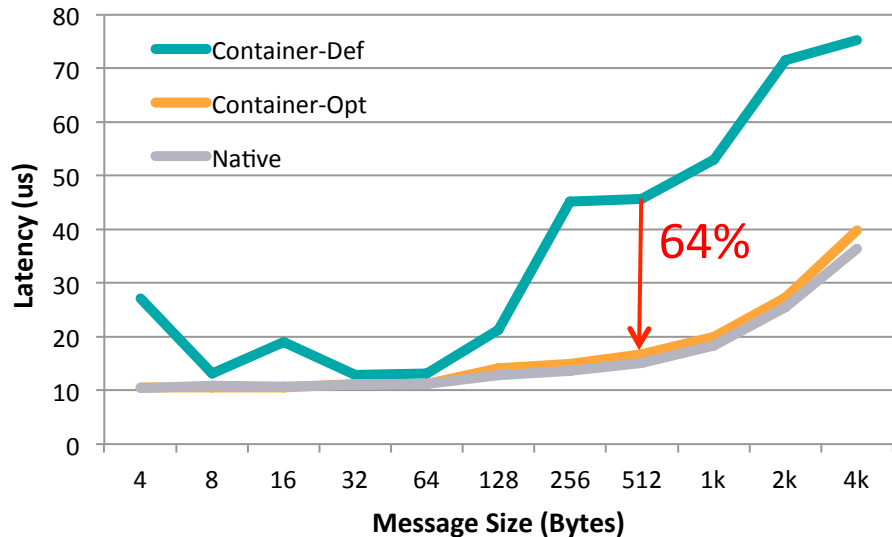



Allreduce

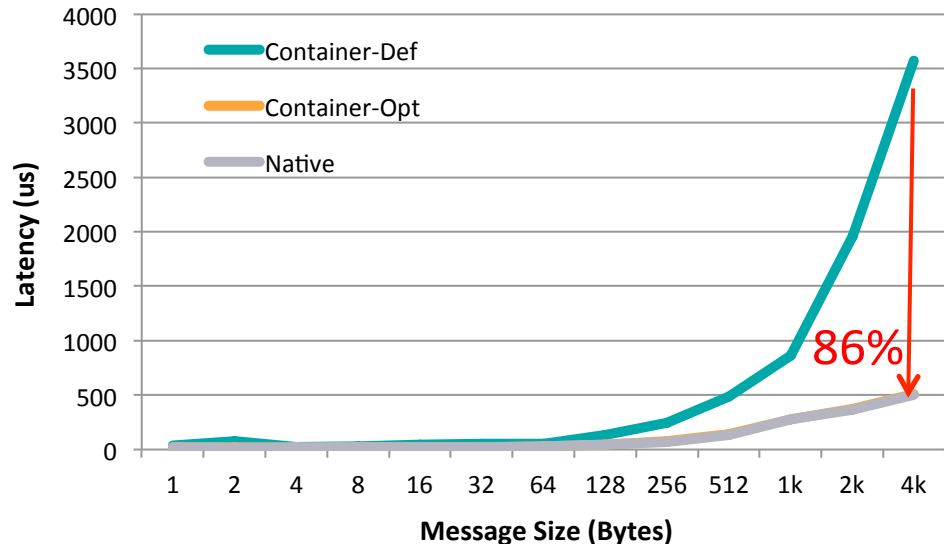

Allgather

- 64 Containers across 16 nodes, pinning 4 Cores per Container
- Compared to Container-Def, up to 64% and 86% improvement on Allreduce and Allgather
- Compared to Native, minor overhead on Allreduce and Allgather

# Containers Support: Application-Level Performance on Chameleon

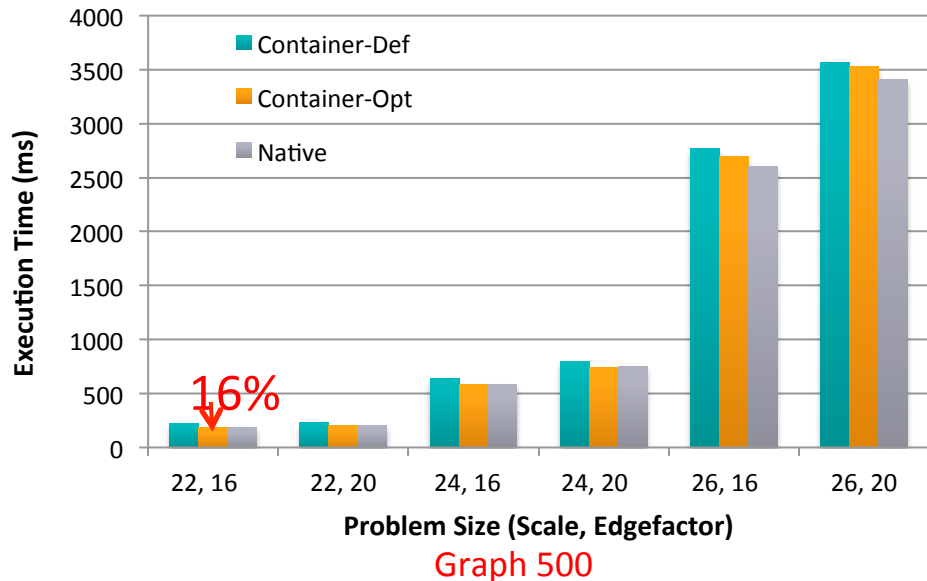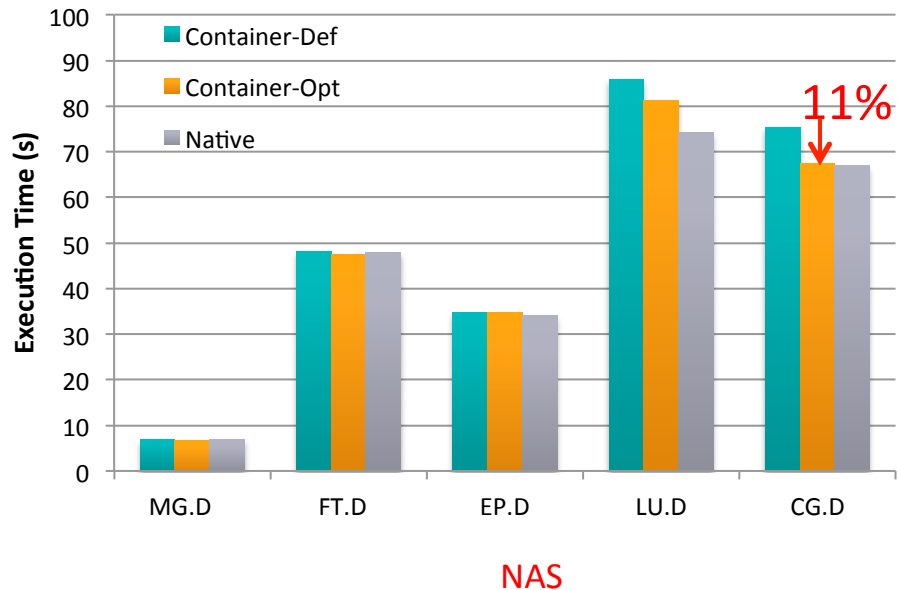

- 64 Containers across 16 nodes, pinning 4 Cores per Container
- Compared to Container-Def, up to **11%** and **16%** of execution time reduction for NAS and Graph 500
- Compared to Native, less than **9 %** and **4%** overhead for NAS and Graph 500
- **Optimized Container support will be available with the upcoming release of MVAICH2-Virt**

# Approaches to Build HPC Clouds

- MVAPICH2-Virt with SR-IOV and IVSHMEM
  - Standalone, OpenStack
- MVAPICH2-Virt on SLURM
  - SLURM alone, SLURM + OpenStack
- MVAPICH2 with Containers
- Appliances (HPC & Big Data) on Chameleon Cloud

# Available Appliances on Chameleon Cloud\*

Appliance	Description
CentOS 7 KVM SR-IOV	Chameleon bare-metal image customized with the KVM hypervisor and a recompiled kernel to enable SR-IOV over InfiniBand. <a href="https://www.chameleoncloud.org/appliances/3/">https://www.chameleoncloud.org/appliances/3/</a>
CentOS 7 SR-IOV MVAPICH2-Virt	The CentOS 7 SR-IOV MVAPICH2-Virt appliance is built from the CentOS 7 KVM SR-IOV appliance and additionally contains MVAPICH2-Virt library. <a href="https://www.chameleoncloud.org/appliances/9/">https://www.chameleoncloud.org/appliances/9/</a>
CentOS 7 SR-IOV RDMA-Hadoop	The CentOS 7 SR-IOV RDMA-Hadoop appliance is built from the CentOS 7 appliance and additionally contains RDMA-Hadoop library with SR-IOV. <a href="https://www.chameleoncloud.org/appliances/17/">https://www.chameleoncloud.org/appliances/17/</a>

- Through these available appliances, users and researchers can easily deploy HPC clouds to perform experiments and run jobs with
  - High-Performance SR-IOV + InfiniBand
  - High-Performance MVAPICH2 Library with Virtualization Support
  - High-Performance Hadoop with RDMA-based Enhancements Support

[\*] Only include appliances contributed by OSU NowLab


# Conclusions

- MVAPICH2-Virt with SR-IOV and IVSHMEM is an efficient approach to build HPC Clouds
  - Standalone
  - OpenStack
- Building HPC Clouds with MVAPICH2-Virt on SLURM is possible
  - SLURM alone
  - SLURM + OpenStack
- Containers-based design for MPAPICH2-Virt
- Very little overhead with virtualization, near native performance at application level
- Much better performance than Amazon EC2
- **MVAPICH2-Virt 2.1** is available for building HPC Clouds
  - SR-IOV, IVSHMEM, OpenStack
- Appliances for MVAPICH2-Virt and RDMA-Hadoop are available for building HPC Clouds
- Future releases for supporting running MPI jobs in VMs/Containers with SLURM
- SR-IOV/container support and appliances for other MVAPICH2 libraries (MVAPICH2-X, MVAPICH2-GDR, ...) and RDMA-Spark/Memcached



# Thank You!

[panda@cse.ohio-state.edu](mailto:panda@cse.ohio-state.edu), [luxi@cse.ohio-state.edu](mailto:luxi@cse.ohio-state.edu)

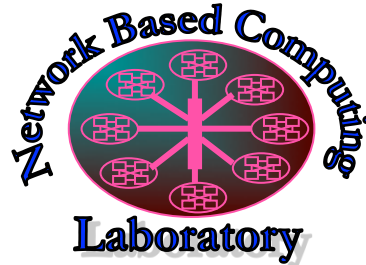

Network-Based Computing Laboratory

<http://nowlab.cse.ohio-state.edu/>



The MVAPICH2/MVAPICH2-X Project

<http://mvapich.cse.ohio-state.edu/>



High-Performance  
Big Data

The High-Performance Big Data Project

<http://hibd.cse.ohio-state.edu/>